

**LITTLE WONDER® Hydro Brush Cutters**

# WITH YOU THROUGH THICK AND EVEN THICKER



## Solid Rods

connect the operator to the transmission, park brake, and cutter blade clutch—no cables to break or adjust.



## Durable Engine Options

available in a durable, Honda® GXV390 and 12.5HP Briggs & Stratton® Intek™ Engines



## 10- and 12-Gauge Formed and Welded Steel

engine base, cutting deck, main frame and control handle construction holds up to the toughest conditions.

## Speed Limiter Dial

allows a firm grip on the control handles right from the start and speed selection while on the go.

## Hydrostatic Transmission

offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse.




Briggs & Stratton model features X-Trac tires with puncture resistant 2-ply casing & aggressive tread design for excellent traction & control in any condition

**LITTLE  
WONDER®**

Professionals Demand Little Wonder.™

LittleWonder.com

**LITTLE WONDER®** Hydro Brush Cutters navigate through weeds, heavy brush and overgrown vegetation with ease. Our welded steel frame design and engine positioning provide excellent balance regardless of the terrain. And unlike the competition, our hydrostatic transmission offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse. So you can cut your own path at your own pace.

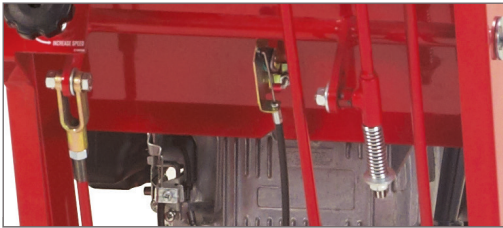


Solid rods connect the operator to the transmission, park brake, cutter blade clutch—no cables to break or adjust.



Honda® model features 16-inch bar tread tires are foam filled to prevent leaks and provide excellent traction and ground clearance on rough terrain.



1-inch diameter spindle is supported by top and bottom sealed ball bearings inside a machined steel hub, a heavy-duty welded outer steel flange and a grease fitting to prevent the induction of moisture.

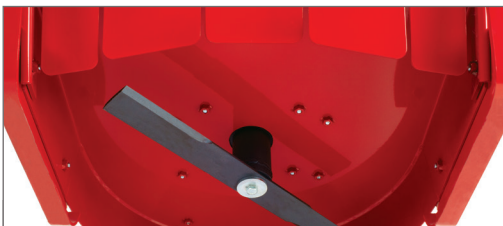

1.5 inches wide, .25-inch plate steel construction skid shoes are adjustable and provide excellent flotation over rough terrain. 10-gauge welded steel deck provides a rugged and deep chamber to cut and chop thick brush.

MODEL NUMBER	5126-22-03	5126-21-03
PRODUCT DESCRIPTION	HYDRO BRC-26 HONDA®	HYDRO BRC-26 BRIGGS & STRATTON®
ENGINE	Honda® GXV390	12.5HP Briggs & Stratton® Intek™
ENGINE TYPE	Air-cooled 4-stroke OHV	
DISPLACEMENT	390cc	344cc
ENGINE CYLINDERS	1	
IGNITION	Recoil Start	
FUEL CAPACITY	2.2 US Quarts (2.1 Liters)	2.8 US Quarts (2.6 Liters)
TRANSMISSION	Hydro-Gear® T2® Transaxle	
TRANSMISSION TYPE	Integrated Hydrostatic Pump/Motor	
AXLE	.75" Solid Steel	
PARK BRAKE	Standard	
DIFFERENTIAL LOCK	Limited Slip	
<b>GROUND SPEED</b>		
FORWARD	Infinitely-variable, 0-4.2 mph	
REVERSE	Infinitely-variable, 0-1.7 mph	
<b>DIMENSIONS</b>		
CUTTING BLADE	26" (.25" Thick)	
SPINDLE	1" Diameter	
SPINDLE BEARINGS	Dual Sealed Ball Bearings	
OVERALL WIDTH	30" (32" at the Handles)	
CUT HEIGHT	3.00" – 5.00"	
CUTTING CAPACITY	Saplings up to 2" diameter	
TIRES	Puncture-proof 16 x 4.8-8 Bar Tread, Foam Filled	16 x 4.80-8 Carlisle X-Trac with Puncture Sealant
UNIT WEIGHT	405 lbs.	367 lbs.
<b>WARRANTY</b>		
UNIT	2-Year Commercial and Rental Use	
ENGINE	3-Year Manufacturer	2-Year Manufacturer

**LITTLE  
WONDER®**

Professionals Demand Little Wonder.™

1028 Street Road • Southampton, PA 18966

1-877-596-6337 • LittleWonder.com

**YOUR LOCAL DEALER IS**